



landscape • entertainment • architectural • hospitality • illumination

DL-30 DIRECTIONAL LIGHTS





120V PAR30 DIRECTIONAL DL-30-NL SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or cast brass Bullet; matching heavy duty cast aluminum or brass adjustable swivel

NOTE: Weep holes standard in bottom of fixture body to allow water to flow through when using outdoor rated PAR30 lamps without fixture lens and to allow air flow for high temperature PAR30 lamps. See DOWN LIGHTS note below for down light applications.

LENS: High impact clear tempered convex glass (-EC extension collar and -AC angle collar models only)

O-RING: High temperature red silicone

LAMP SUPPLIED: None; Use only outdoor rated 120v PAR30 lamps (100w max)

LAMP OPTIONS: We recommend 15w PAR30 Arrow LED with 50,000 hour average rating.

SOCKET: High temperature ceramic medium base with 250°C silicone lead wires

WIRING: Standard 120 volt Black, White and Ground 9" lead wires

MOUNTING: None supplied. See Mounting Accessories below for options

FINISH: Aluminum-Black texture polyester powder coat; optional finishes available
Brass-Unfinished brass; optional finishes available

DOWN LIGHTS: Add -D suffix to end of catalog number for down light without weep holes.




DL-30-NL-EC-BRS




ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-30-NL-BLT	Cast Aluminum PAR30 Bullet	None	3.0 lbs.
DL-30-NL-BRS	Cast Brass PAR30 Bullet	None	5.0 lbs.
DL-30-NL-EC-BLT	Cast Aluminum PAR30 Bullet, Extension Collar, Convex Lens	None	3.0 lbs.
DL-30-NL-EC-BRS	Cast Brass PAR30 Bullet, Extension Collar, Convex Lens	None	5.0 lbs.
DL-30-NL-AC-BLT	Cast Aluminum PAR30 Bullet, Angle Collar, No Lens	None	4.0 lbs.
DL-30-NL-AC-BRS	Cast Brass PAR30 Bullet, Angle Collar No Lens	None	6.0 lbs.
DL-30-NL-ACL-BLT	Cast Aluminum PAR30 Bullet, Angle Collar, Convex Lens	None	4.0 lbs.
DL-30-NL-ACL-BRS	Cast Brass PAR30 Bullet, Angle Collar Convex Lens	None	6.0 lbs.



DL-30-NL



DL-30-NL-EC



DL-30-NL-AC



-EC & -AC Models with Lens



BEAM/GLARE CONTROL ACCESSORIES

FA-08-30	Round 1/4" Hex Cell Louver
FA-10-30-BLUE	Blue Tempered Glass Lens
FA-10-30-GREEN	Green Tempered Glass Lens
FA-40	Aluminum Extension Cap, Tempered Convex Glass Lens
FA-40-AC	Aluminum Angle Cap, Tempered Convex Glass Lens
FA-98-30	Linear Spread Tempered Glass Lens
FA-104-30	Wide Spread Tempered Glass Lens Softener

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT





DIRECTIONAL LIGHTS DL-30-NL SERIES

TYPE



MOUNTING ACCESSORIES

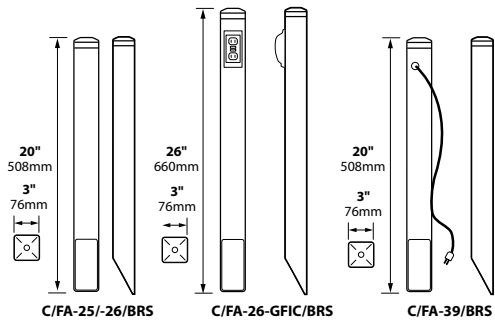


FA-111



FA-111-TREE
(10"-41")



FA-22-TREE
(10"-41")

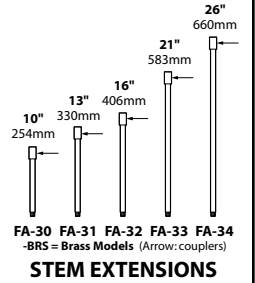

STEM EXTENSIONS